

---

## WALLAROO QUICK PACK-UP – BAGGING WITH WHEELS EXPOSED

Wallaroo can be quickly packed with wheels exposed to a form that is easy to load onto a pickup roof rack, into a van or onto a trailer. In this form, one person can hold the hitch and roll Wallaroo into position for lifting or sliding onto a vehicle.

In another form of packing, all struts are separated and packed for airfreight but this is tedious and not to be done daily.



1. Lay the bag flat with 'INSIDE' facing up.




2. Roll the folded Wallaroo, with telescopic extensions retracted, onto the bag with the wheel axles above the rear slots.






3. Loop the red-taped hook through the large carabiner on the hitch and attach it to its own cord.
4. Thread the long end of the red-taped cord in order through the holes with red labels, pulling tight as you go. The cord should enter through the sides with 'I' and exit from 'O'. Loop the cord back around after holes 6, 8, 10, 12 and 14 as shown below.
5. Lock the end of the cord in one of the tensioners.

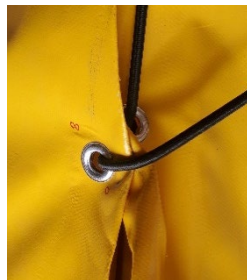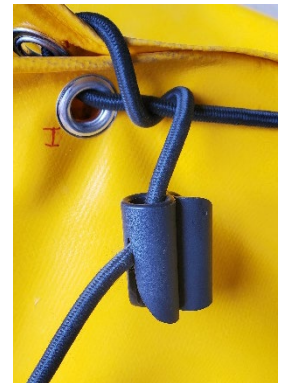

6. Thread the green-taped cord through the green-labelled holes. Don't worry about looping the cord around itself. Pull tight and lock in the tensioner attached at the other end of the cable.

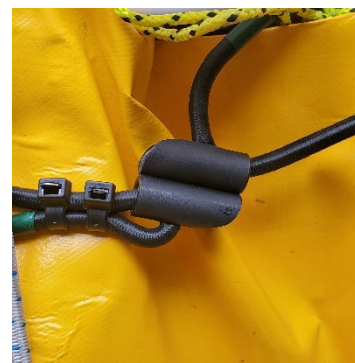

7. Thread the blue-taped cord through the blue-labelled holes. After passing through hole 12, loop the cord around itself just before hole 9 before continuing. Pass the end through the same tensioner as the red cord and pull both tight.

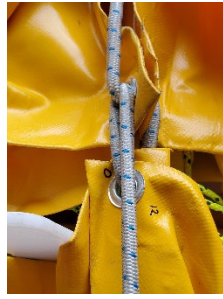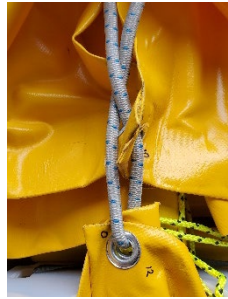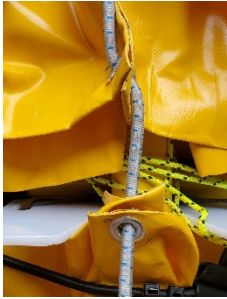

8. Pull the two white hooks on one side over the top and attach to the loops of rope on the frame of the Wallaroo. Repeat with the remaining two hooks.

